

SentryS-Pro



High performance Sensor Box with dual-core MCU for sensor and data management integrating GNSS and a high-precision Time Base Unit (TBU) to guarantee accurate synchronization across multiple devices.
Continuous, uninterrupted data streaming until 500 sps is allowed.

APPLICATIONS

- Seismic and volcanic monitoring
 - HVSR measurements
 - Structural Health Monitoring (e.g. dams, bridge, viaducts, buildings, industrial machinery) except for structures characterized by very weak vibrations
- Dynamic identification for SHM

MAIN FEATURES

- ACCELEROMETER WITH VERY LOW SELF-NOISE (0.2 $\mu\text{g}/\sqrt{\text{Hz}}$)
- 32 BIT RESOLUTION
- ADJUSTABLE SAMPLING RATE (100, 200, 400, 500 sps)
- Programmable high- and low- pass digital filter
- FULL-SCALE RANGE $\pm 15 \text{ g}$

- Integrated temperature, humidity, pressure sensor
- Compatible with standard software such as Earthworm, SeisComP and support SEEDLink data transfer
- Ultra-low-latency mode for EEW
- Continuous, periodic, or event-triggered acquisition
- PRECISE SYNCHRONIZATION ACROSS MULTIPLE NODES (< 0.1 ms)
- 128 GB micro SD
- ETHERNET PoE, WIRELESS, 3G-4G optional) for data transfer and remote monitoring
- OUTPUT DATA FORMAT IN MINISEED or others on request
- 12 Vdc from electrical power source (with ac-dc adapter) - BATTERY or SOLAR PANEL (optional)
- STATE-OF-HEALTH monitoring
- System Status LEDs

OPTIONAL

- Single Board Computer
- Bi-axial digital INCLINOMETER

MOSYS S.R.L. Sede: via Togliatti 2, 81055 Santa Maria Capua Vetere (CE)
E-mail: info@mosys.it PEC: mosyssrl@legalmail.it


SentryS-Pro



FEATURES

SYSTEM	
Device with digital very-low noise MEMS accelerometer, environmental integrated sensor and dual-mode digital inclinometer	
SENSORS	
type - characteristics	
ACCELEROMETER	Triaxial digital MEMS (orthogonal axes)
ADC	Sigma-Delta 32-bit
Output bandwidth	DC – 460 Hz
Output Full Scale Range	± 15 g
Resolutio	0.06 µG/LSB
Dynamic Range	~ 150 dB
Noise density	0.2 µg / √ Hz
Data Output Rate	1000 sps
Operating temperature	- 30 to + 85 °C
ENVIRONMENTAL	
temperature	oper. range -40 ÷ +85 °C (±1.0°C accuracy)
Humidity	oper. range 0 ÷ 100 % rel. humidity (±3% accuracy)
Pressure	oper. Range 300 ÷1100 hPa (±1 hPa absolute accuracy)
INCLINOMETER (optional)	Dual-mode digital inclinometer
Dual-axis (horizontal operation)	±90°
Single-axis (vertical operation)	±180°
Accuracy	0.1°
Resolution	0.025°
TIME BASE UNIT	
GNSS module	GPS L1C/A, SBAS L1C/A, QZSS L1C/A, QZSS L1 SAIF, GLONASS L1OF, BeiDou B1I, Galileo E1B/C Accuracy of time pulse RMS 30 ns
Real Time Clock (RTC)	The TBU uses the GNSS receiver or the RTC, when the first cannot produce a fix, to adjust the output frequencies
POWER	
Power voltage range	10–36V DC*
Power consumption (at 12 V DC)	< 1 W standard
Types of power supply	12 Vdc, electrical power source (AC-DC adapter) 12 Vdc from battery 12 V from solar panel 20 W LAN PoE (optional)

PHYSICAL		
Standard	SentryS-Pro	
	Width	160 mm
	Depth	100 mm
	Height	60 mm
	Weight	900 grams
	Enclosure/Materials	Hard anodised aluminium
	Communication / Connector	Military specification cconnector
	Environmental protection	IP67

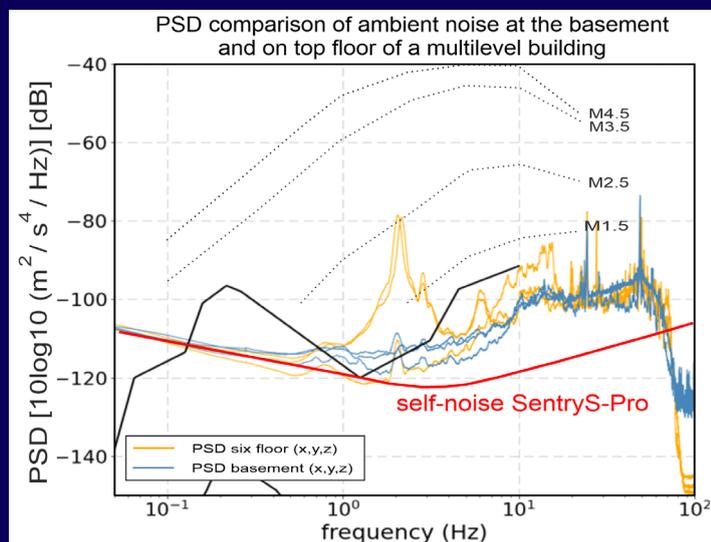

Self-noise plot of the accelerometer compared with measurements of ambient noise in a multilevel building